


# CL Challenger Lifts

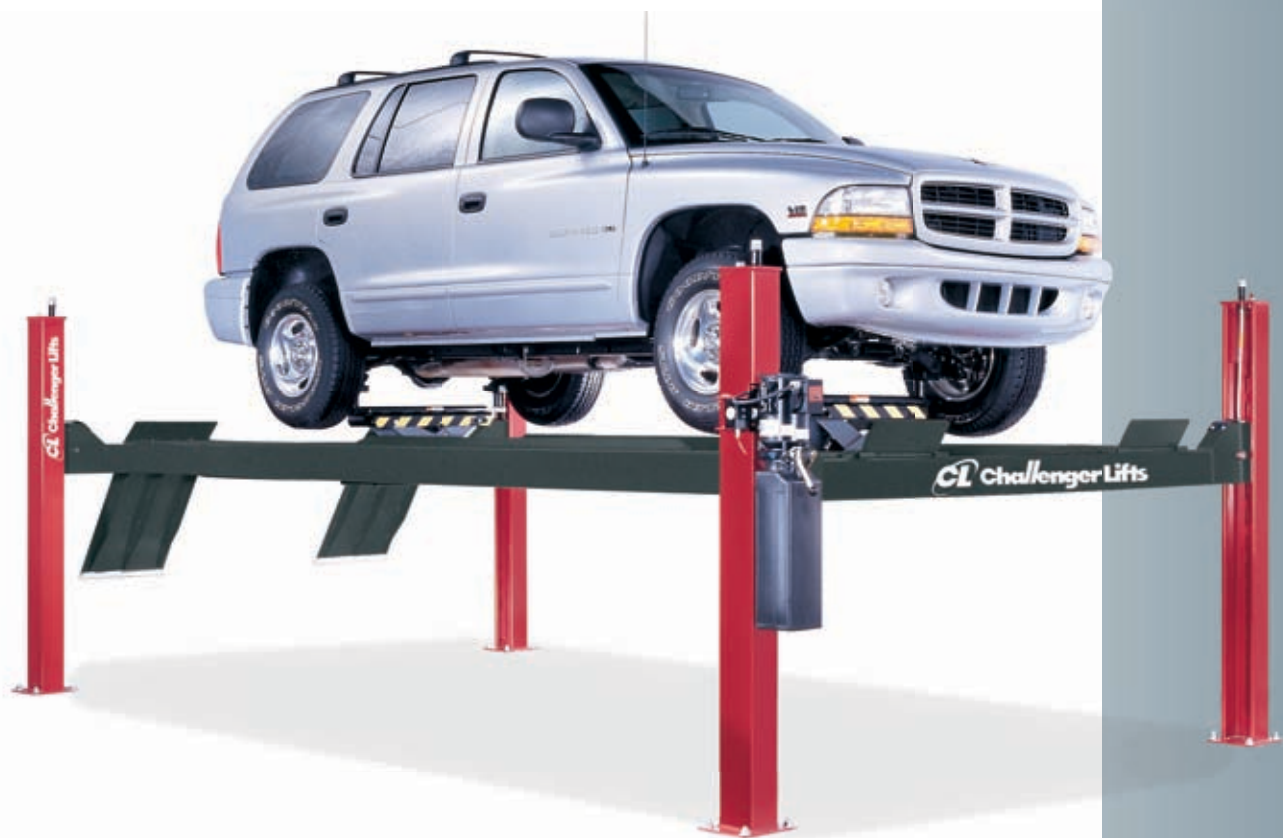

**Model#: 40EFX**

Surface Mounted 4-Post Lift  
12,000 lb. lifting capacity  
(shown with optional 6k lb. capacity rolling jacks)

## 40series 4-Post Lifts

Expand your service offering and increase your revenue potential with Challenger Lifts' 12,000 lb. four-post lifts.

Our 40series is loaded with features you would expect to pay more for, like solid piece column construction, automatic wheel stops, wheel curbs and anti-skid coating on runways to minimize slipping, etc.

With optional rolling jacks, bolt-on alignment kit, oil drain pan, etc., you'll be able to accommodate just about anything that comes in for service. Available in custom colors.


## Features & Benefits:

- The highest rise in the industry provides more working room underneath vehicles
- Durable non-skid runway and ramp surfaces for positive vehicle traction and technician safety
- Fully gusseted base plate reduces column deflection and is less sensitive to uneven floors (open front models)
- Oversized solid machined steel pulleys for prolonged pulley and cable life
- Adjustable runways to accommodate a variety of tread widths
- Hydraulic cylinder mounted underneath runway
- 14 level locking positions for a variety of general service tasks
- Optional bolt on alignment kit converts general service rack into alignment rack
- Many accessories available, such as air/electric workstation, rolling jacks and oil drain pan, plus custom color options make the 40series a complete productivity center

For more information, contact your Authorized Challenger Lifts Distributor:

	Narrow Bay	Standard Length	Extended Length	XL Extended Length	Open Front Extended	Open Front XL Extended
<b>Model Number</b>	<b>40NFX</b>	<b>40SFX</b>	<b>40EFX</b>	<b>40XFX</b>	<b>40EFO</b>	<b>40XFO</b>
Lifting Capacity	12,000 lb. (5443kg)				12,000 lb. (5443kg)	
Max. Wheelbase <sup>1</sup>	157 1/2" (4001mm)		182 1/2" (4636mm)	210" (5334mm)	182 1/2" (4636mm)	210" (5334mm)
<b>A</b> Rise Height	78" (1981mm)				78" (1981mm)	
<b>B</b> Length Overall	18' 3 1/2" (5575mm)		20' 4 1/2" (6210mm)	22' 8" (6909mm)	20' 9" (6325mm)	23' (7010mm)
<b>C</b> Width Overall	10' 3 3/4" (3067mm)		10' 10 3/4" (3321mm)		11' 10" front - 10' 10 3/4" rear (3607mm front - 3321mm rear)	
<b>D</b> Inside Columns	106" (2692mm)		116" (2946mm)		120" front - 116" rear (3048mm front - 2946mm rear)	
<b>E</b> Between Columns	171" (4343mm)		196" (4978mm)	223 1/2" (5677mm)	195" (4953mm)	222 1/2" (5652mm)
<b>F</b> Height of Columns	90 1/2" (2299mm)				99 1/2" front - 90 1/2" rear (2527mm front - 2299mm rear)	
<b>G</b> Width of Runways	20" (508mm)				20" (508mm)	
<b>H</b> Height of Runways	7" (178mm)				7" (178mm)	
<b>I</b> Width Between Runways (Minimum / Maximum)	40" / 43" (1016mm / 1092mm)				43" (1092mm)	
Air Supply Required	85-115 psi				85-115 psi	
Motor	2HP				2HP	
Voltage (1 Phase Std.) <sup>2</sup>	208v-230v				208v-230v	
Speed of Rise	70 Sec.				70 Sec.	

<sup>1</sup> Maximum wheelbase is based on a tire diameter of 30". | <sup>2</sup> Optional 3 phase electrical also available. Standard lift colors are Red and Blue. Optional colors available.

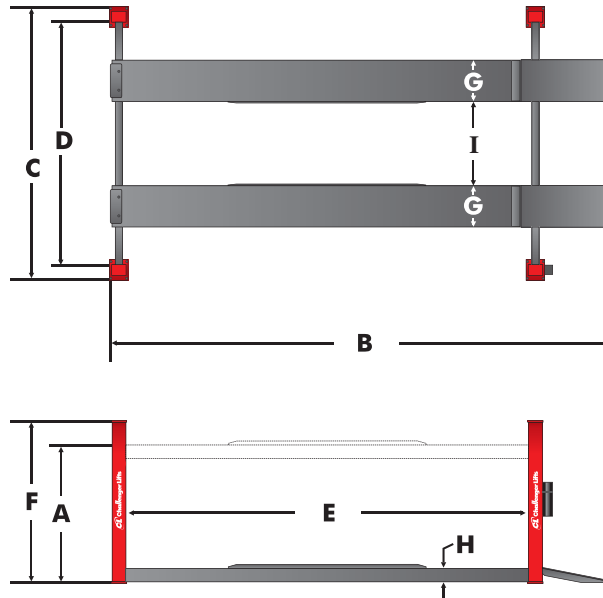

Schedule Contract GS-07F-8950D



The Automotive Lift Institute (ALI) certifies that the 40series described herein comply with the applicable provisions of the American National Standards ANSI/ALI ALCIV 2006 and are Third Party Validated by the ETL Testing Laboratory.

CHALLENGER LIFTS, INC. Phone Toll-Free: 800-648-5438  
200 Cabel Street 502-625-0700  
Louisville, Kentucky 40206 Fax: 502-625-0711

E-mail: sales@challengerylifts.com

Challenger Lifts, Inc. reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.